





FAG


21307-E1-XL-K-TVPB 

Spherical Roller Bearing

Spherical roller bearings 213...-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

X-life

Informacje techniczne

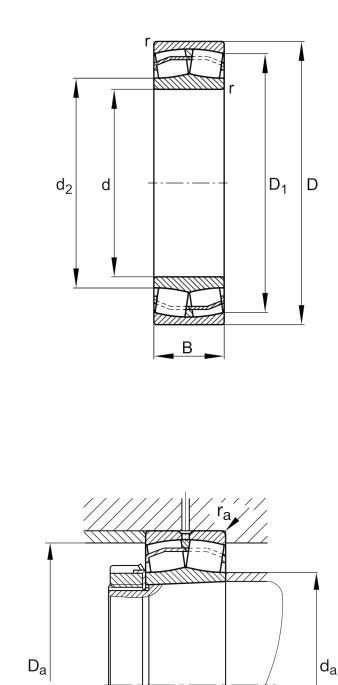

Twoja aktualna wersja produktu

Design	E1	Without central rip
Cage	TVPB	Plastic cage
Radial internal clearance	CN (Group N)	Normal internal clearance
Relubrication	Without	Without lubricating groove and holes

Main Dimensions & Performance Data

d	35 mm	Bore diameter
D	80 mm	Outside diameter
B	21 mm	Width
C _r	83.000 N	Basic dynamic load rating, radial
C _{0r}	74.000 N	Basic static load rating, radial
C _{ur}	8.300 N	Fatigue load limit, radial
n _G	10.900 1/min	Limiting speed
n _{gr}	6.800 1/min	Reference speed
≈m	0,491 kg	Masa



Mounting dimensions

$d_{a \min}$	44 mm	Minimum diameter shaft shoulder
$D_{a \max}$	71 mm	Maximum diameter of housing shoulder
$r_{a \max}$	1,5 mm	Maximum recess radius
$B_{a \min}$	8 mm	Minimum cavity width of the sleeve
$d_{a \max}$	47 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	39 mm	Minimum cavity diameter of the sleeve

Dimensions

$r_{\min}$	1,5 mm	Minimum chamfer dimension
D_1	66,6 mm	Bore diameter outer ring
d_2	47,4 mm	Raceway diameter of the inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Calculation factors

e	0,26	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	2,55	Dynamic axial load factor
Y_2	3,8	Dynamic axial load factor
Y_0	2,5	Static axial load factor

Additional information

H307

Adapter sleeve



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna