





FAG


22324-E1-XL-K-T41A-C3

Spherical Roller Bearing

Spherical roller bearings 223...-E1-K-T41A,
For oscillating load with restricted diameter
tolerances, with tapered bore

X-life

Informacje techniczne

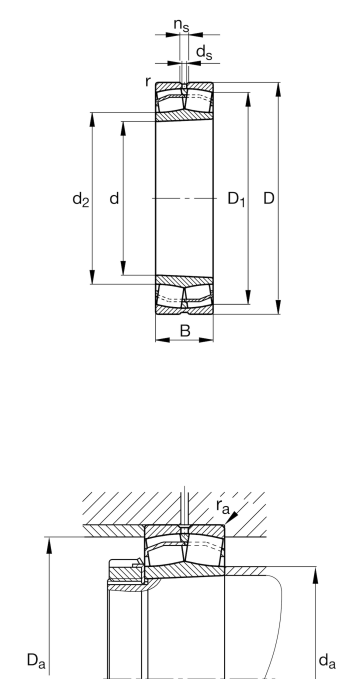

Twoja aktualna wersja produktu

Design	E1	Without central rip
Bore type	K	Tapered, taper 1:12
Cage	JPA	Sheet metal cage
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Relubrication	Standard	
Spherical roller bearing for vibrating screens	T41A	For vibrating screens

Main Dimensions & Performance Data

d	120 mm	Bore diameter
D	260 mm	Outside diameter
B	86 mm	Width
C _r	1.080.000 N	Basic dynamic load rating, radial
C _{0r}	1.170.000 N	Basic static load rating, radial
C _{ur}	105.000 N	Fatigue load limit, radial
n _G	2.850 1/min	Limiting speed
n _{gr}	2.000 1/min	Reference speed
≈m	22,44 kg	Masa



Mounting dimensions

d _{a min}	134 mm	Minimum diameter shaft shoulder
d _{a max}	150 mm	Maximum diameter of shaft shoulder
D _{a max}	246 mm	Maximum diameter of housing shoulder
r _{a max}	2,5 mm	Maximum recess radius
d _{b min}	131 mm	Minimum cavity diameter of the sleeve
B _{a min}	7 mm	Minimum cavity width of the sleeve

Dimensions

r _{min}	3 mm	Minimum chamfer dimension
D ₁	222,4 mm	Bore diameter outer ring
d ₂	150,7 mm	Raceway diameter of the inner ring
d _s	8 mm	Diameter lubrication hole
n _s	15 mm	Width of lubricating groove

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.

Calculation factors

e	0,33	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y ₁	2,06	Dynamic axial load factor
Y ₂	3,06	Dynamic axial load factor
Y ₀	2,01	Static axial load factor

Additional information

H2324	Adapter sleeve
AHX2324G	Withdrawal sleeve



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna