





FAG


22332-BE-XL-K-JPA-T41A [🔗](#)

Spherical Roller Bearing

Spherical roller bearings 223...-E1-K-T41A,
For oscillating load with restricted diameter
tolerances, with tapered bore

X-life

Informacje techniczne

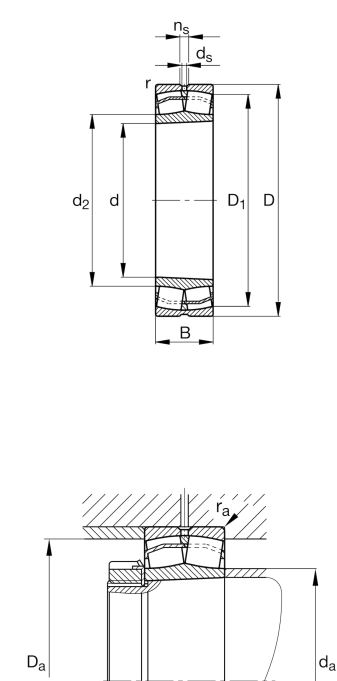

Twoja aktualna wersja produktu

Design	BE	With lose center lip ring
Bore type	K	Tapered, taper 1:12
Cage	JPA	Sheet metal cage
Radial internal clearance	C4 (Group 4)	Internal clearance larger than C3
Relubrication	Standard	
Spherical roller bearing for vibrating screens	T41A	For vibrating screens

Main Dimensions & Performance Data

d	160 mm	Bore diameter
D	340 mm	Outside diameter
B	114 mm	Width
C _r	1.680.000 N	Basic dynamic load rating, radial
C _{0r}	1.990.000 N	Basic static load rating, radial
C _{ur}	162.000 N	Fatigue load limit, radial
n _G	2.250 1/min	Limiting speed
n _{gr}	1.420 1/min	Reference speed
≈m	49 kg	Masa



Mounting dimensions

$d_{a \min}$	177 mm	Minimum diameter shaft shoulder
$d_{a \max}$	191 mm	Maximum diameter of shaft shoulder
$D_{a \max}$	323 mm	Maximum diameter of housing shoulder
$r_{a \max}$	3 mm	Maximum recess radius
$d_{b \min}$	174 mm	Minimum cavity diameter of the sleeve
$B_{a \min}$	8 mm	Minimum cavity width of the sleeve

Dimensions

$r_{\min}$	4 mm	Minimum chamfer dimension
D_1	286,7 mm	Bore diameter outer ring
d_2	201,2 mm	Raceway diameter of the inner ring
d_s	9,5 mm	Diameter lubrication hole
n_s	17,7 mm	Width of lubricating groove

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.

Calculation factors

e	0,35	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,94	Dynamic axial load factor
Y_2	2,88	Dynamic axial load factor
Y_0	1,89	Static axial load factor

Additional information

H2332	Adapter sleeve
AH2332G	Withdrawal sleeve



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Obciążenie osiowe dwukierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Łożysko gabarytowe
-  Nieosiowość statyczna
-  Nieosiowość dynamiczna