



FAG


30330-XL

Tapered roller bearing

Tapered roller bearings 303, main dimensions  
acc. to DIN 720, separable

X-life

Informacje techniczne

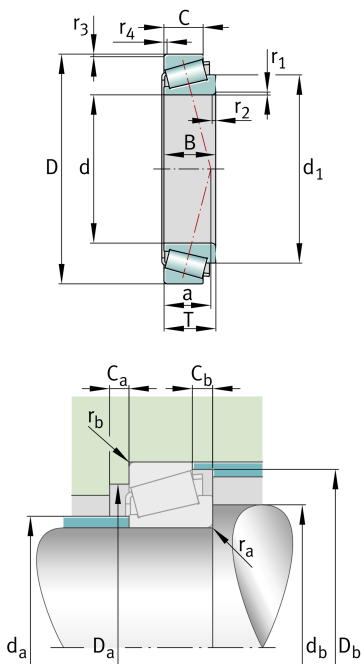

Twoja aktualna wersja produktu

|                 |          |                                              |
|-----------------|----------|----------------------------------------------|
| Tolerance class | PN       | Normal (ISO 492:2023)                        |
| Heat treatment  | Standard |                                              |
| Cage            | Standard | Sheet steel cage, window cage, roller-guided |
| Internal design | Standard |                                              |
| Quality level   | XL       | X-life                                       |
| Number of rows  | 1        | Single-row design                            |

Main Dimensions & Performance Data

|                 |             |                                   |
|-----------------|-------------|-----------------------------------|
| d               | 150 mm      | Bore diameter                     |
| D               | 320 mm      | Outside diameter                  |
| B               | 65 mm       | Width, inner ring                 |
| C               | 55 mm       | Width, outer ring                 |
| T               | 72 mm       | Width, total                      |
| C <sub>r</sub>  | 1.000.000 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 1.030.000 N | Basic static load rating, radial  |
| C <sub>ur</sub> | 127.000 N   | Fatigue load limit, radial        |
| n <sub>G</sub>  | 2.750 1/min | Limiting speed                    |
| n <sub>gr</sub> | 1.630 1/min | Thermal speed rating              |
| m               | 25 kg       | Masa                              |



15.09.2026, 05:44:28 UTC

**SCHAEFFLER**

|                    |        |                                      |
|--------------------|--------|--------------------------------------|
| d <sub>a</sub> max | 189 mm | Maximum diameter of shaft shoulder   |
| d <sub>b</sub> min | 168 mm | Minimum diameter of shaft shoulder   |
| D <sub>a</sub> min | 273 mm | Minimum diameter of housing shoulder |
| D <sub>a</sub> max | 302 mm | Maximum diameter of housing shoulder |
| D <sub>b</sub> min | 292 mm | Minimum diameter of housing shoulder |
| C <sub>a</sub> min | 9 mm   | Minimum axial space                  |
| C <sub>b</sub> min | 17 mm  | Minimum axial space                  |
| r <sub>a</sub> max | 5 mm   | Maximum fillet radius of shaft       |
| r <sub>b</sub> max | 4 mm   | Maximum fillet radius of housing     |

|                       |          |                                                   |
|-----------------------|----------|---------------------------------------------------|
| r <sub>1, 2 min</sub> | 5 mm     | Minimum chamfer dimension of inner ring back face |
| r <sub>3, 4 min</sub> | 4 mm     | Minimum chamfer dimension of outer ring back face |
| a                     | 60 mm    | Distance between the apexes of the pressure cones |
| d <sub>1</sub>        | 221,5 mm | Guidance rib diameter of inner ring               |

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 200 °C | Operating temperature max. |

|                |      |                                                                                  |
|----------------|------|----------------------------------------------------------------------------------|
| e              | 0,35 | Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y |
| Y              | 1,74 | Dynamic axial load factor                                                        |
| Y <sub>0</sub> | 0,96 | Static axial load factor                                                         |

| T2GB150 | Comparative designation to ISO 10317 and ISO 355 |
|---------|--------------------------------------------------|
|---------|--------------------------------------------------|

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje



### Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Łożysko gabarytowe