



FAG


32026-X-XL-DF-A250-300

Tapered roller bearing set

Tapered roller bearing set 320...-DF, X-arrangement

X-life

Informacje techniczne

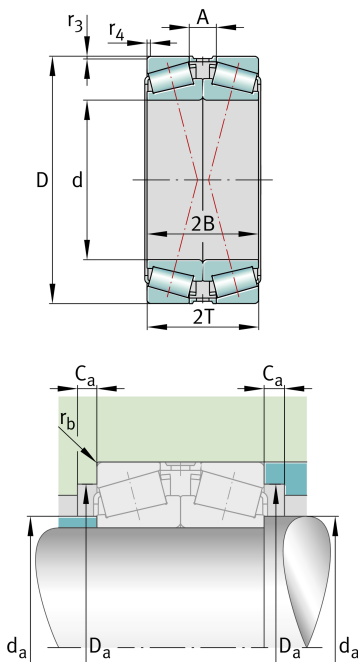

Twoja aktualna wersja produktu

Tolerance class	P6X	Class 6X (ISO 492:2023)
Heat treatment	Standard	
Cage	Standard	Sheet steel cage, window cage, roller-guided
Axial internal clearance	A250-300	Axial internal clearance between 250 and 300 µm
Quality level	XL	X-life
Matched arrangement	F	X arrangement
Number of rows	2	Double-row design

Main Dimensions & Performance Data

d	130 mm	Bore diameter
D	200 mm	Outside diameter
2B	90 mm	Inner ring total width
2T	90 mm	Outer ring total width
C _r	700.000 N	Basic dynamic load rating, radial
C _{0r}	1.100.000 N	Basic static load rating, radial
C _{ur}	162.000 N	Fatigue load limit, radial
n _G	4.000 1/min	Limiting speed
n _{gr}	1.960 1/min	Thermal speed rating
≈m	10,246 kg	Masa



Mounting dimensions

$d_{a\ max}$	144 mm	Maximum diameter of shaft shoulder
$D_{a\ min}$	178 mm	Minimum diameter of housing shoulder
$D_{a\ max}$	190 mm	Maximum diameter of housing shoulder
$C_{a\ min}$	8 mm	Minimum axial space
$r_{b\ max}$	2 mm	Maximum fillet radius of housing

Dimensions

$r_{3,\ 4\ min}$	2 mm	Minimum chamfer dimension of outer ring back face
A	22 mm	Width of spacer

Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Calculation factors

e	0,43	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1,55	Dynamic axial load factor
Y_2	2,31	Dynamic axial load factor
Y_0	1,52	Static axial load factor

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie smarem
	Smarowanie olejem
	Bez uszczelnienia