


**FAG****6001-C-2BRS-TVH-L082-R4-11>V**

Deep groove ball bearing

Deep groove ball bearing 60...-C-2BRS-TVH,
single row, Generation C, shields, plastic
cage

Informacje techniczne

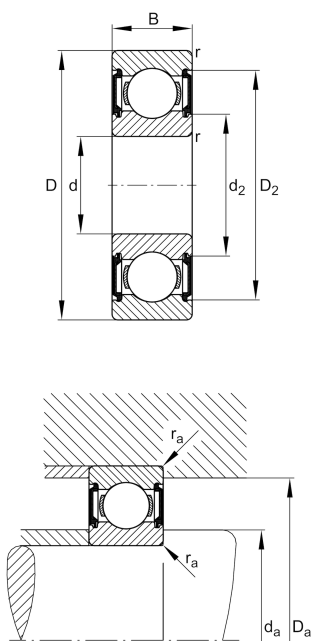

Twoja aktualna wersja produktu

Version code	>V	Not marked on bearing
Changed internal design	C	GenerationC
Sealing	2BRS	Non-contact seal on both sides
Cage	TVH	Solid cage made of glass-fiber reinforced polyamid PA66
Tolerance class	P6	Class 6 (ISO 492:2023)
Dimensional / heat stabilization	SN	Rings dimensional stabilized up to 120°
Lubricant	L082	Grease (L082/customer specific)
Radial internal clearance	R\$-\$	Special radial internal clearance in μm
Bore type	Z	Cylindrical

Main Dimensions & Performance Data

d	12 mm	Bore diameter
D	28 mm	Outside diameter
B	8 mm	Width
C _r	5.900 N	Basic dynamic load rating, radial
C _{0r}	2.370 N	Basic static load rating, radial
C _{ur}	164 N	Fatigue load limit, radial
n _G	36.000 1/min	Limiting speed
n _{gr}	26.000 1/min	Reference speed
≈m	0,019 kg	Masa



Mounting dimensions

$d_{a\ min}$	14 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	26 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	0,3 mm	Maximum fillet radius

Dimensions

$r_{\min}$	0,3 mm	Minimum chamfer dimension
D_1	23,34 mm	Shoulder diameter outer ring
D_2	25,1 mm	Caliber diameter outer ring
d_1	16,66 mm	Shoulder diameter inner ring
d_2	15,69 mm	Caliber diameter inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.

Calculation factors

f_0	13,1	Calculation factor
-------	------	--------------------

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Smarowanie smarem
	Uszczelnienie dwustronne