




FAG

6003-2RSD-TVH-L178-C3

Deep groove ball bearing

Deep groove ball bearing 60...-2RSD-TVH, single row, shields, plastic cage

Informacje techniczne

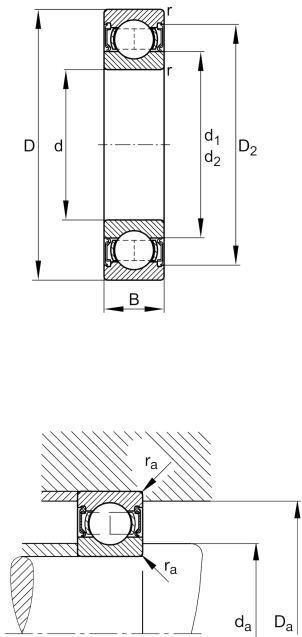

Twoja aktualna wersja produktu

Sealing	2RSD	Non-contact seal on both sides
Cage	TVH	Solid cage made of glass-fiber reinforced polyamid PA66
Tolerance class	PN	Normal (ISO 492:2023)
Dimensional / heat stabilization	SN	Rings dimensional stabilized up to 120°
Lubricant	L178	Grease (L178/customer specific)
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Bore type	Z	Cylindrical

Main Dimensions & Performance Data

d	17 mm	Bore diameter
D	35 mm	Outside diameter
B	10 mm	Width
C _r	6.400 N	Basic dynamic load rating, radial
C _{0r}	3.250 N	Basic static load rating, radial
C _{ur}	162 N	Fatigue load limit, radial
n _G	26.000 1/min	Limiting speed
n _{gr}	20.300 1/min	Reference speed
m	39 g	Masa



Mounting dimensions

$d_{a\ min}$	19 mm	Minimum diameter shaft shoulder
$D_{a\ max}$	33 mm	Maximum diameter of housing shoulder
$r_{a\ max}$	0,3 mm	Maximum fillet radius

Dimensions

$r_{\min}$	0,3 mm	Minimum chamfer dimension
D_1	29,48 mm	Shoulder diameter outer ring
D_2	30,81 mm	Caliber diameter outer ring
d_1	22,65 mm	Shoulder diameter inner ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	100 °C	Operating temperature max.

Calculation factors

f_0	14,3	Calculation factor
-------	------	--------------------

Właściwości

	Obciążenie promieniowe
	Obciążenie osiowe jednokierunkowe
	Obciążenie osiowe dwukierunkowe
	Smarowanie dożywotnie, bezobsługowe
	Smarowanie smarem
	Uszczelnienie dwustronne