



FAG


7038-MP-UA

Angular contact ball bearing

Angular contact ball bearing 70..-MP, single row, solid brass cage



Informacje techniczne

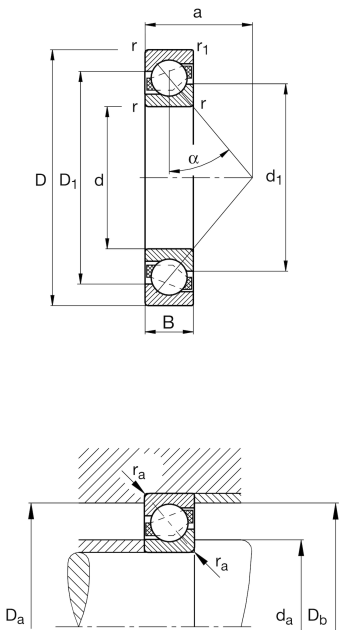

Twoja aktualna wersja produktu

Sealing	Without	Not sealed
Cage	MP	Solid brass cage, ball guided
Tolerance class	PN	Normal (ISO 492:2023)
Dimensional / heat stabilization	S1	Rings dimensional stabilized up to 200°
Bearing with matched conditions for fitting in pairs	UA	Bearing set with small axial internal clearance
Lubricant	Without	Bearing not greased

Main Dimensions & Performance Data

d	190 mm	Bore diameter
D	290 mm	Outside diameter
B	46 mm	Width
C _r	228.000 N	Basic dynamic load rating, radial
C _{0r}	310.000 N	Basic static load rating, radial
C _{ur}	10.400 N	Fatigue load limit, radial
n _G	3.350 1/min	Limiting speed
n _{gr}	2.390 1/min	Reference speed
m	10,299 kg	Masa



Mounting dimensions

d a min	200,2 mm	Minimum diameter of shaft shoulder
D a max	279,8 mm	Maximum diameter of housing shoulder
D b max	284 mm	Maximum diameter of housing shoulder
r a max	2,1 mm	Maximum fillet radius of shaft
r a1 max	1 mm	Maximum fillet radius of housing

Dimensions

r min	2,1 mm	Minimum chamfer dimension
r 1 min	1,1 mm	Minimum chamfer dimension
D 1	254,1 mm	Shoulder diameter on outer ring wide side face
d 1	228,04 mm	Shoulder diameter on inner ring wide side face
a	92,3 mm	Distance between the apexes of the pressure cones
α	30 °	Contact angle

Temperature range

T min	-30 °C	Operating temperature min.
T max	200 °C	Operating temperature max.

Additional information

Tol (+)	16 μm	Tolerance for axial clearance or preload per set
A min	80 μm	Axial clearance per set min.

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia