



IMAGE  
COMING SOON





**FLCTE40-XL-FA107-OSE**

Flanged housing unit

Flanged housing unit FLCTE...-XL-FA107-  
OSE

X-life

Informacje techniczne

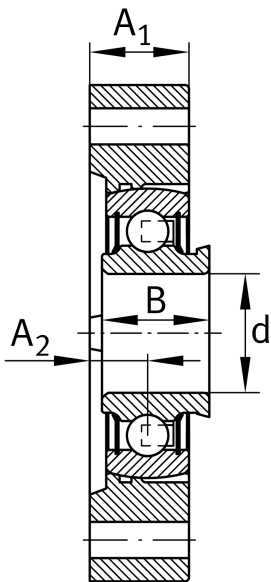

Twoja aktualna wersja produktu

|                        |     |                                 |
|------------------------|-----|---------------------------------|
| Material               | GG  | Grey cast iron                  |
| Without locking device | OSE | Bearing without locking element |

Main Dimensions & Performance Data

|                 |          |                                   |
|-----------------|----------|-----------------------------------|
| d               | 40 mm    | Bore diameter                     |
| L               | 100 mm   | Flange width                      |
| H               | 150 mm   | Height flange                     |
| U               | 31,7 mm  | Total height unit                 |
| C <sub>r</sub>  | 32.500 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 19.800 N | Basic static load rating, radial  |
| ≈m              | 1,15 kg  | Masa                              |

Mounting dimensions

|   |        |                          |
|---|--------|--------------------------|
| J | 119 mm | Distance fixing bore     |
| N | 14 mm  | Fixing bore              |
| n | 2      | Number of screwing holes |

Dimensions

|                |         |                     |
|----------------|---------|---------------------|
| A <sub>1</sub> | 26 mm   | Thickness of flange |
| A <sub>2</sub> | 13,5 mm | Distance raceway    |
| B              | 30,2 mm | Width               |



Additional information

|                |                     |
|----------------|---------------------|
| 1              | Number of housings  |
| GEHLCTE08-GG   | Housing             |
| RAE40-XL-NPP-B | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |