


GE60-UK-2RS

Spherical plain bearing

Radial spherical plain bearing, maintenance-free, sliding layer: ELGOGLIDE, DIN ISO 12240-1, Tolerances of the outside diameter and bore not according to DIN ISO 12240-1, dimension series E, sealed

Informacje techniczne

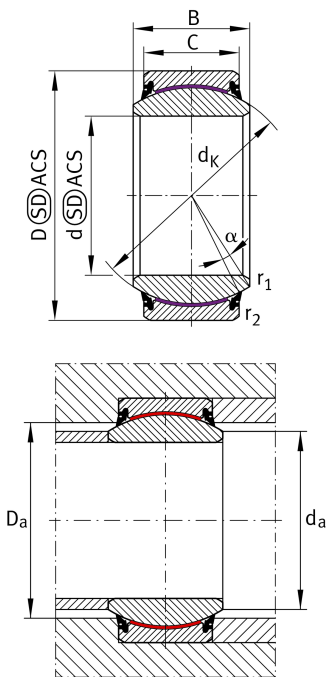

Twoja aktualna wersja produktu

Maintenance	Maintenance free	
Sealing	2RS	Lip seal on both sides
Bore lining	Without	
Coating	Without	
Fabric	ELGOGLIDE	
Material	Steel	

Main Dimensions & Performance Data

d	60 mm	Bore diameter bearing
C _r	691.000 N	Basic dynamic load rating, radial
D	90 mm	Outside diameter bearing
B	44 mm	Width inner ring
C	36 mm	Width Outer ring
C _{0r}	1.150.000 N	Basic static load rating, radial
m	0,979 kg	Masa

Mounting dimensions

r _{1smin}	1 mm	Edge Spacing
r _{2smin}	1 mm	Edge Spacing
D _{amin}	75 mm	Housing Connection Diameter
d _{amax}	66,8 mm	Connection measurement, inner ring



Dimensions

d _K	80 mm	Ball diameter
α	6 °	Tilt angle
D _{OT}	0 mm	Outside diameter, upper tolerance
D _{UT}	-0,015 mm	Outside diameter, lower tolerance
B _{OT}	0 mm	Width inner ring, upper tolerance
d _{UT}	-0,015 mm	Bore diameter bearing, lower tolerance
B _{UT}	-0,15 mm	Width inner ring, lower tolerance
d _{OT}	0 mm	Bore diameter bearing, upper tolerance
C _{OT}	0 mm	Width outer ring, upper tolerance
C _{UT}	-0,4 mm	Width outer ring, lower tolerance
G _r	0 - 0,06 mm	Radial Clearance
G _{rmax}	0,06 mm	Radial clearance, maximum
G _{rmin}	0 mm	Radial clearance, minimum

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	130 °C	Operating temperature max.

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie dożywotnie, bezobsługowe
- 

Uszczelnienie dwustronne
- 

Nieosiowość statyczna
- 

Nieosiowość dynamiczna