




GLCTEY20

Flanged housing unit

Flanged housing unit GLCTEY

Informacje techniczne

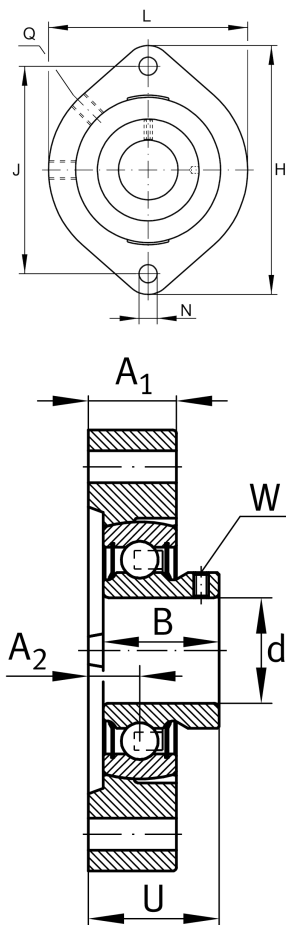

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	20 mm	Bore diameter
L	66,5 mm	Flange width
H	90,5 mm	Height flange
U	33 mm	Total height unit
C _r	13.600 N	Basic dynamic load rating, radial
C _{0r}	6.600 N	Basic static load rating, radial
≈m	0,37 kg	Masa

Mounting dimensions

J	71,4 mm	Distance fixing bore
N	9 mm	Fixing bore
W	2,5 mm	Width of flats
n	2	Number of screwing holes

Dimensions

A ₁	17 mm	Thickness of flange
A ₂	9,5 mm	Distance raceway
B	25 mm	Width
Q	M6	Connection thread for lubrication



Additional information

1	Number of housings
GEHGLCTE04-GG	Housing
GAY20-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.