




GLCTEY25-N

Flanged housing unit

Flanged housing unit GLCTEY-N

Informacje techniczne

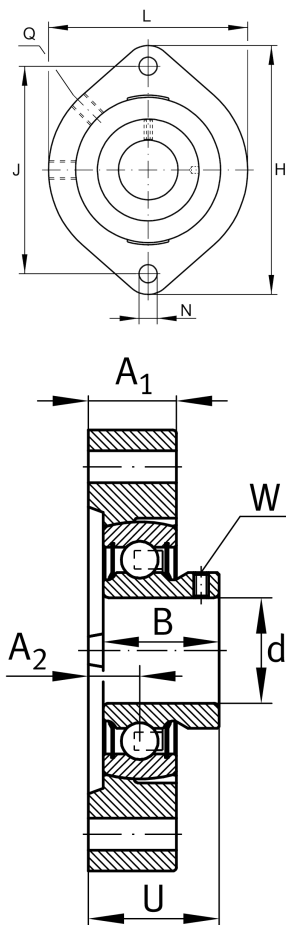

Twoja aktualna wersja produktu

|          |    |                                                   |
|----------|----|---------------------------------------------------|
| Groove   | N  | Cast iron housing with undercut slot for end caps |
| Material | GG | Grey cast iron                                    |

Main Dimensions & Performance Data

|                 |          |                                   |
|-----------------|----------|-----------------------------------|
| d               | 25 mm    | Bore diameter                     |
| L               | 71 mm    | Flange width                      |
| H               | 97 mm    | Height flange                     |
| U               | 29,4 mm  | Total height unit                 |
| C <sub>r</sub>  | 14.000 N | Basic dynamic load rating, radial |
| C <sub>0r</sub> | 7.800 N  | Basic static load rating, radial  |
| ≈m              | 0,43 kg  | Masa                              |

Mounting dimensions

|   |         |                          |
|---|---------|--------------------------|
| J | 76,2 mm | Distance fixing bore     |
| N | 9 mm    | Fixing bore              |
| W | 2,5 mm  | Width of flats           |
| n | 2       | Number of screwing holes |

Dimensions

|                |         |                                   |
|----------------|---------|-----------------------------------|
| A <sub>1</sub> | 19,5 mm | Thickness of flange               |
| A <sub>2</sub> | 9,9 mm  | Distance raceway                  |
| B              | 27 mm   | Width                             |
| Q              | M6      | Connection thread for lubrication |



Additional information

|                 |                     |
|-----------------|---------------------|
| GEHGLCTE05-GG-N | Housing             |
| GAY25-XL-NPP-B  | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 100 °C | Operating temperature max. |