




FAG

HCM7006-C-2RSD-T-P4S-UL-XL

High speed spindle bearing

High speed spindle bearing HCM70...-C-2RSD, adjusted, in pairs or sets, contact angle  $\alpha = 17^\circ$ , with ceramic balls, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne

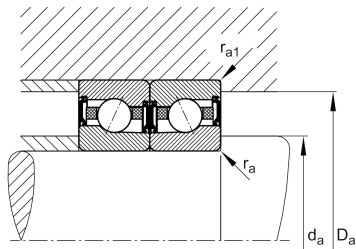

Twoja aktualna wersja produktu

|                         |                          |                                                                  |
|-------------------------|--------------------------|------------------------------------------------------------------|
| Preload                 | L                        | Preload light                                                    |
| Contact angle           | Contact angle $17^\circ$ | Contact angle $17^\circ$                                         |
| Sealing                 | 2RSD                     | Non-contact sealed on both sides and greased "for life"          |
| Cage                    | T                        | Laminated fabric cage                                            |
| Tolerance class         | P4S                      | Tolerance class P4S, FAG standard better than P4 to ISO 492:2023 |
| Arrangement bearing set | U                        | Single bearing                                                   |

Main Dimensions & Performance Data

|                          |              |                                       |
|--------------------------|--------------|---------------------------------------|
| d                        | 30 mm        | Bore diameter                         |
| D                        | 55 mm        | Outside diameter                      |
| B                        | 13 mm        | Width                                 |
| C <sub>r</sub>           | 8.900 N      | Basic dynamic load rating, radial     |
| C <sub>0r</sub>          | 3.900 N      | Basic static load rating, radial      |
| C <sub>ur</sub>          | 315 N        | Fatigue load limit, radial            |
| n <sub>G</sub><br>Grease | 48.000 1/min | Limiting speed for grease lubrication |
| ≈m                       | 108,4 g      | Masa                                  |



Mounting dimensions

|                     |        |                                                   |
|---------------------|--------|---------------------------------------------------|
| d <sub>a</sub>      | 36 mm  | Diameter shaft shoulder                           |
| d <sub>a</sub>      | h12    | Diameter shaft shoulder clearance                 |
| D <sub>a</sub>      | 49 mm  | Shoulder diameter outer ring                      |
| D <sub>a</sub>      | H12    | Shoulder diameter outer ring clearance            |
| r <sub>a max</sub>  | 1 mm   | Maximum recess radius                             |
| r <sub>a1 max</sub> | 0,3 mm | Maximum recess radius                             |
| a                   | 13 mm  | Distance between the apexes of the pressure cones |

Dimensions

|                    |        |                           |
|--------------------|--------|---------------------------|
| r <sub>min</sub>   | 1 mm   | Minimum chamfer dimension |
| r <sub>1 min</sub> | 0,6 mm | Minimum chamfer dimension |
| α                  | 17 °   | Contact angle             |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -30 °C | Operating temperature min. |
| T <sub>max</sub> | 80 °C  | Operating temperature max. |

Additional information

|                   |         |                       |
|-------------------|---------|-----------------------|
| F <sub>V L</sub>  | 30 N    | Preload force light   |
| F <sub>V M</sub>  | 79 N    | Preload force medium  |
| F <sub>V H</sub>  | 166 N   | Preload force heavy   |
| K <sub>aE L</sub> | 87 N    | Lift-off force light  |
| K <sub>aE M</sub> | 235 N   | Lift-off force medium |
| K <sub>aE H</sub> | 507 N   | Lift-off force heavy  |
| c <sub>a L</sub>  | 29 N/μm | Axial rigidity light  |
| c <sub>a M</sub>  | 42 N/μm | Axial rigidity medium |
| c <sub>a H</sub>  | 56 N/μm | Axial rigidity heavy  |



### Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne