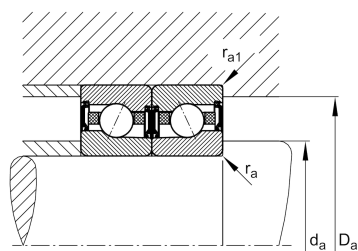


**FAG****X-life****HCM71912-E-2RSD-T-P4S-UL-XL** **High speed spindle bearing**

High speed spindle bearing HCM719...-E-2RSD, adjusted, in pairs or sets, contact angle $\alpha = 25^\circ$, with ceramic balls, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne**Twoja aktualna wersja produktu**

Preload	L	Preload light
Contact angle	E	Contact angle 25°
Sealing	2RSD	Non-contact sealed on both sides and greased "for life"
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing

Main Dimensions & Performance Data

d	60 mm	Bore diameter
D	85 mm	Outside diameter
B	13 mm	Width
C_r	18.600 N	Basic dynamic load rating, radial
C_{0r}	10.000 N	Basic static load rating, radial
C_{ur}	810 N	Fatigue load limit, radial
n_G Grease	26.000 1/min	Limiting speed for grease lubrication
$\approx m$	157,46 g	Masa



Mounting dimensions

d _a	65 mm	Diameter shaft shoulder
d _a	h12	Diameter shaft shoulder clearance
D _a	80,5 mm	Shoulder diameter outer ring
D _a	H12	Shoulder diameter outer ring clearance
r _{a max}	0,6 mm	Maximum recess radius
r _{a1 max}	0,3 mm	Maximum recess radius
a	23,4 mm	Distance between the apexes of the pressure cones

Dimensions

r _{min}	1 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	80 °C	Operating temperature max.

Additional information

F _{V L}	117 N	Preload force light
F _{V M}	306 N	Preload force medium
F _{V H}	637 N	Preload force heavy
K _{aE L}	335 N	Lift-off force light
K _{aE M}	887 N	Lift-off force medium
K _{aE H}	1.869 N	Lift-off force heavy
c _{a L}	110 N/μm	Axial rigidity light
c _{a M}	154 N/μm	Axial rigidity medium
c _{a H}	201 N/μm	Axial rigidity heavy



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne