




**FAG****HSS7019-C-T-P4S-UL**

High speed spindle bearing

High speed spindle bearing HSS70...-C, adjusted, in pairs or sets, contact angle $\alpha = 15^\circ$, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne

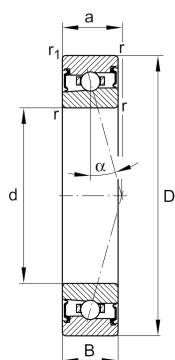

Twoja aktualna wersja produktu

Contact angle	C	Contact angle 15°
Sealing	2RSD	Non-contact sealed on both sides and greased "for life"
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing
Preload	L	Preload light
Lubricant	GA21	Grease for super precision bearings, standard

Main Dimensions & Performance Data

d	95 mm	Bore diameter
D	145 mm	Outside diameter
B	24 mm	Width
C_r	36.500 N	Basic dynamic load rating, radial
C_{0r}	27.500 N	Basic static load rating, radial
C_{ur}	2.650 N	Fatigue load limit, radial
n_G Grease	13.000 1/min	Limiting speed for grease lubrication
n_G	20.000 1/min	Limiting speed
$\approx m$	1,292 kg	Masa



Mounting dimensions

d _a	105 mm	Diameter shaft shoulder
d _a	h12	Diameter shaft shoulder clearance
D _a	136 mm	Shoulder diameter outer ring
D _a	H12	Shoulder diameter outer ring clearance
r _a max	1,5 mm	Maximum recess radius
r _{a1} max	0,6 mm	Maximum recess radius
a	28,1 mm	Distance between the apexes of the pressure cones

Dimensions

r _{min}	1,5 mm	Minimum chamfer dimension
r ₁ min	1,5 mm	Minimum chamfer dimension
α	15 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	80 °C	Operating temperature max.

Additional information

F _{V L}	127 N	Preload force light
F _{V M}	382 N	Preload force medium
F _{V H}	764 N	Preload force heavy
K _{aE L}	380 N	Lift-off force light
K _{aE M}	1.192 N	Lift-off force medium
K _{aE H}	2.480 N	Lift-off force heavy
c _{a L}	67 N/μm	Axial rigidity light
c _{a M}	105 N/μm	Axial rigidity medium
c _{a H}	143 N/μm	Axial rigidity heavy



Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie dożywotnie, bezobsługowe
-  Smarowanie smarem
-  Uszczelnienie dwustronne