



KBS20-PP

Linear Ball Bearing

Linear ball bearings KBS.-PP, machined range, adjustable, sealed on all sides, corrosion-resistant design possible

Informacje techniczne

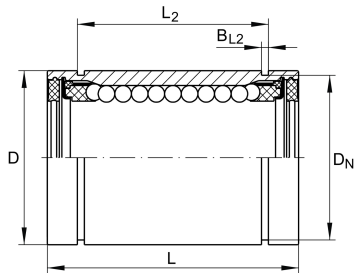

Twoja aktualna wersja produktu

Size Code 20

Main Dimensions & Performance Data

|                    |         |                     |
|--------------------|---------|---------------------|
| F <sub>w</sub>     | 20 mm   | Bore diameter       |
| D                  | 32 mm   | Outside diameter    |
| L                  | 45 mm   | Length              |
|                    | h12     | Tolerance           |
| C <sub>min</sub>   | 1.570 N | Load capacity dyn.  |
| C <sub>0 min</sub> | 1.230 N | Load capacity stat. |
| C <sub>max</sub>   | 1.660 N | Load capacity dyn.  |
| C <sub>0 max</sub> | 1.570 N | Load capacity stat. |
| ≈m                 | 87,02 g | Masa                |

Mounting dimensions

|                 |         |                      |
|-----------------|---------|----------------------|
| L <sub>2</sub>  | 31,2 mm |                      |
|                 | H13     | Tolerance            |
| B <sub>L2</sub> | 1,6 mm  |                      |
| B <sub>3</sub>  | 1 mm    |                      |
| D <sub>N</sub>  | 30,3 mm |                      |
| N <sub>2</sub>  | 2 mm    |                      |
| X               | 62,5 °  |                      |
|                 | 6       | Number of rows balls |