


KGBAO50-PP-AS 

Linear Ball Bearing and Housing Unit

Linear ball bearing and housing unit; open design, sealed, greased, with relubrication facility; corrosion-resistant design possible

Informacje techniczne

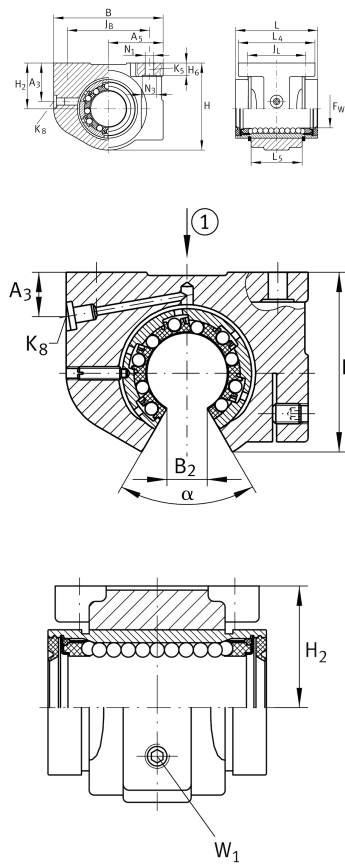

Twoja aktualna wersja produktu

Size Code	50
Seal	PP
Relubrication	AS

Technical data

	5	Ball rows
≈m	1,65 kg	Masa

Main Dimensions & Performance Data

F _W	50 mm	Diameter of ball complement
H	93 mm	Height
L	100 mm	Length
Tol L	h12	Tolerance
B	130 mm	Width
C	8.900 N	Load capacity dyn. C
C ₀	6.600 N	Load capacity stat. C0



Mounting dimensions

J B	108 mm	
Tol J B	+ 0,2 mm	Upper tolerance
Tol J B	- 0,2 mm	Lower tolerance
A 5	65 mm	
Tol A 5	+ 0,015 mm	Upper tolerance
Tol A 5	- 0,015 mm	Lower tolerance
B 2	22,7 mm	
L 4	70 mm	
L 5	72 mm	
J L	50 mm	
Tol J L	+ 0,2 mm	Upper tolerance
Tol J L	- 0,2 mm	Lower tolerance
H 2	50 mm	Height shaft
Tol H 2	+ 0,015 mm	Upper tolerance
Tol H 2	- 0,015 mm	Lower tolerance
A 3	19 mm	
H 6	12,5 mm	
Tol H 6	- 0,5 mm	Tolerance
N 1	9,2 mm	
N 3	15 mm	
K 5	M8	
K 8	NIPA2	Lubrication nipple
W 1	4 mm	Width across flats
M W 1 max	7 Nm	Max. tightening torque
α	54 °	Angle