




KSR16-L0-08-10-18-16

Roller chain idler sprocket unit

Roller chain idler sprocket units KSR...L0, sprocket made from steel or sintered iron

Informacje techniczne

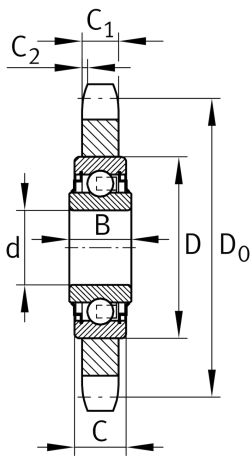

Main Dimensions & Performance Data

|     |         |                                 |
|-----|---------|---------------------------------|
| d   | 16,2 mm | Bore diameter                   |
| d   | 0,1 mm  | Upper tolerance                 |
| d   | 0 mm    | Lower tolerance                 |
| C 1 | 7 mm    | Thickness of sprocket           |
| D 0 | 73,1 mm | Pitch circle diameter (gearing) |
| D k | 78,6 mm | Tip diameter (gearing)          |
| ≈m  | 0,2 kg  | Masa                            |

Mounting dimensions

|   |         |                 |
|---|---------|-----------------|
| p | 12,7 mm | Tooth set       |
| z | 18      | Number of teeth |
|   | x       | ISO chain       |
|   | x       | ANSI chain      |

Dimensions

|     |         |                   |
|-----|---------|-------------------|
| C 2 | 1,1 mm  | Chamfer width     |
| D   | 40 mm   | Outside diameter  |
| C   | 12 mm   | Width, outer ring |
| B   | 18,3 mm | Width inner ring  |