



**KUVS10-B**

Linear recirculating ball bearing unit

linear recirculating ball bearing units for
guideway with raceways on both sides

Informacje techniczne

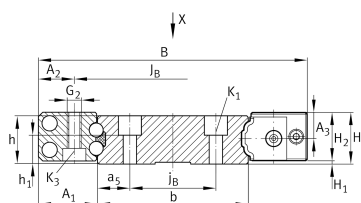

Twoja aktualna wersja produktu

Size Code 10

Suffix code B

Main Dimensions & Performance Data

H	11 mm	Height system
B	51,6 mm	Width system
L	47 mm	Length linear recirculating ball bearing units
h	10 mm	Height rail
b	31,8 mm	Width rail
l _{max}	1.960 mm	Max. length rail
C	5.700 N	Load capacity dyn C
C ₀	10.600 N	Load capacity dyn
M _{0X}	203 Nm	Moment ratings M0X
M _{0Y}	51 Nm	Moment ratings M0Y
M _{0Z}	51 Nm	Moment ratings M0Z
≈m	24,836 g	Masa



Mounting dimensions

A 1	9,9 mm	
A 2	5,5 mm	
J B	40,6 mm	
j B	18 mm	
a 5	6,9 mm	
L 1	29,8 mm	
J L	15 mm	
j L	40 mm	
a Lmin	20 mm	
a Lmax	34 mm	
a Rmin	20 mm	
a Rmax	34 mm	
H 1	0,5 mm	Free space, system dimension
H 2	10,5 mm	Height linear recirculating ball bearing units
A 3	6 mm	
h 1	3,4 mm	
K 1	M3	Thread
K 1 MA	2,5 Nm	Tightening torque
G 2	M3	Thread
G 2 MA	1,5 Nm	Tightening torque
d 1	3,8 mm	Diameter

Related products

TKVD32	Associated rail(s)
KA8-TN	Closing plug rail