


KWVE15-B-EC-V1-G3

Recirculating ball bearing carriage

Carriages KWVE...-B-EC, expanded interchangeability, short carriage, four-row

Informacje techniczne



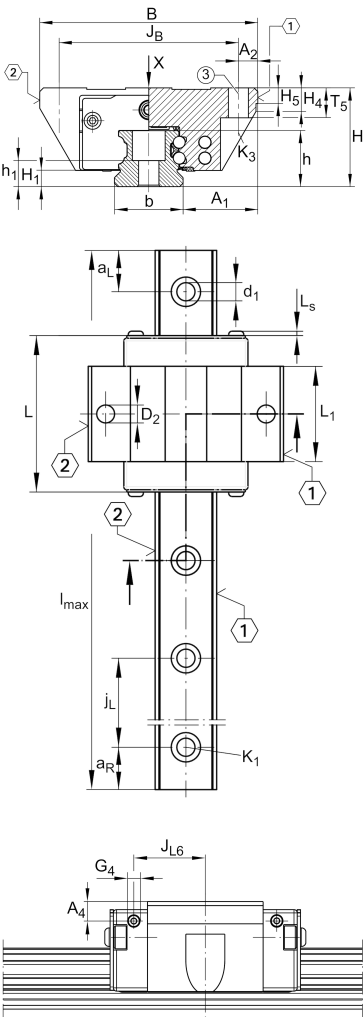


Twoja aktualna wersja produktu

Size Code	15	
Version	B	
Carriage design	EC	Expanded design, short carriage (carriage without screw threads)
Preload	V1	Preload class 1
Accuracy class	G3	

Main Dimensions & Performance Data

H	24 mm	Height system
B	52 mm	Width carriage
L	44,5 mm	Overall length carriage
C	4.900 N	Dynamic load rating
C ₀	8.300 N	Static load rating
M _{0x}	86 Nm	Static moment rating about X axis
M _{0y}	35 Nm	Static moment rating about Y axis
M _{0z}	35 Nm	Static moment rating about Z axis
≈m	0,145 kg	Masa

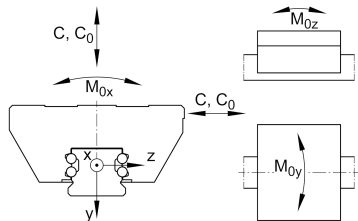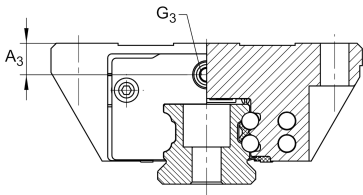

S16

Mounting dimensions

A 1	18,5 mm	Distance from locating edge on carriage to locating edge on guideway
J B	41 mm	
b	15 mm	Width rail
A 2	5,5 mm	Distance from locating edge to hole
L 1	23,1 mm	
L S	1,3 mm	
H 1	4,3 mm	Free space, system dimension
H 4	6,1 mm	
H 5	4,75 mm	
T 5	7 mm	Thread depth
K 3	M4	Fixing screws below (DIN ISO 4762-12.9)
K3 M A	5 Nm	Maximum tightening torque
D 2	4,5 mm	
A 3	4,3 mm	Position lubrication connector
G 3	M3	Lubrication connector
t G 3	5,5 mm	Maximum permissible screw depth for lubrication connectors
A 4	3,2 mm	Position lubrication connector
G 4	M3	Lubrication connector
t G 4	5,5 mm	Maximum permissible screw depth for lubrication connectors
J L6	15,8 mm	Position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------