


KWVE25-B-SN-V1-G3

Recirculating ball bearing carriage

Carriages KWVE...-B-SN, narrow, low carriage, four-row

Informacje techniczne

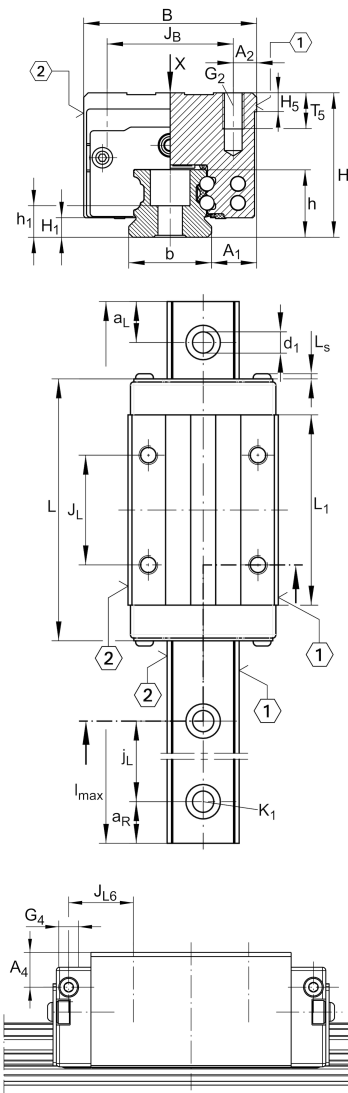


Twoja aktualna wersja produktu

Size Code	25	
Version	B	
Carriage design	SN	Narrow, low carriage
Preload	V1	Preload class 1
Accuracy class	G3	

Main Dimensions & Performance Data

H	31 mm	Height system
B	48 mm	Width carriage
L	83,3 mm	Overall length carriage
C	17.900 N	Dynamic load rating
C ₀	37.000 N	Static load rating
M _{0x}	510 Nm	Static moment rating about X axis
M _{0y}	395 Nm	Static moment rating about Y axis
M _{0z}	395 Nm	Static moment rating about Z axis
≈m	0,47 kg	Masa

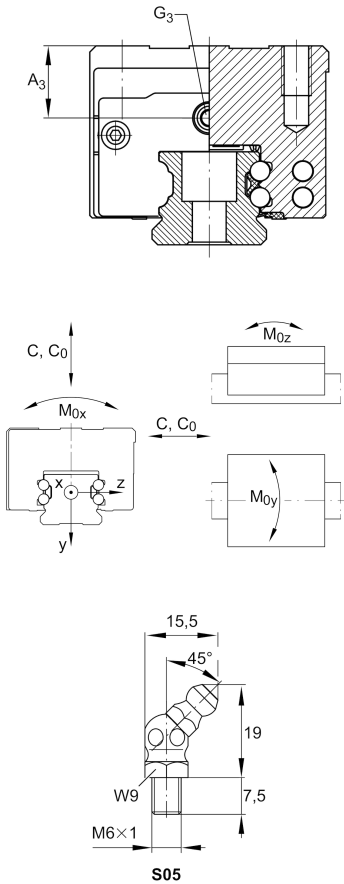

Mounting dimensions

A 1	12,5 mm	Distance from locating edge on carriage to locating edge on guideway
J B	35 mm	
b	23 mm	Width rail
A 2	6,5 mm	Distance from locating edge to hole
L 1	60,7 mm	
L S	1,65 mm	
J L	35 mm	
H 1	5,1 mm	Free space, system dimension
H 5	5,25 mm	
T 5	7,5 mm	Thread depth
G 2	M6	Fixing screws above (DIN ISO 4762-12.9)
G2 M A	17 Nm	Maximum tightening torque
A 3	6 mm	Position lubrication connector
G 3	M6	Lubrication connector
t G 3	7 mm	Maximum permissible screw depth for lubrication connectors
A 4	4 mm	Position lubrication connector
G 4	M3	Lubrication connector
t G 4	6 mm	Maximum permissible screw depth for lubrication connectors
J L6	17,9 mm	Position lubrication connector

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------