
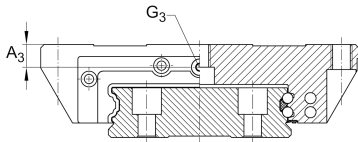
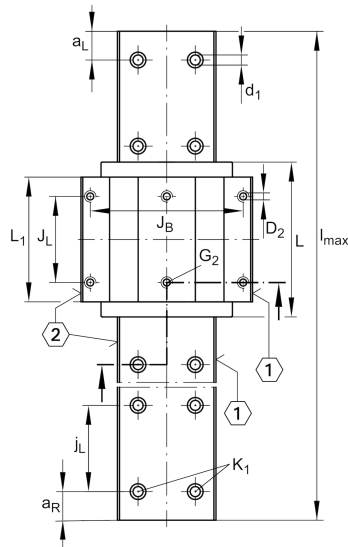


KWVE25-W-V1-G3

Recirculating ball bearing carriage

Carriages KWVE...-W, wide carriage for linear recirculating ball bearing and guideway assembly

Informacje techniczne


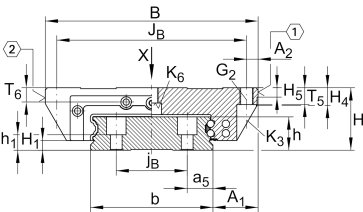


Twoja aktualna wersja produktu

Size Code	25	
Version	Version	
Carriage design	W	Wide carriage and wide guideway
Preload	V1	Preload class 1
Accuracy class	G3	

Main Dimensions & Performance Data

H	35 mm	Height system
B	120 mm	Width carriage
L	81,7 mm	Overall length carriage
C	17.900 N	Dynamic load rating
C ₀	37.000 N	Static load rating
M _{0x}	1.470 Nm	Static moment rating about X axis
M _{0y}	395 Nm	Static moment rating about Y axis
M _{0z}	395 Nm	Static moment rating about Z axis
≈m	1,079 kg	Masa

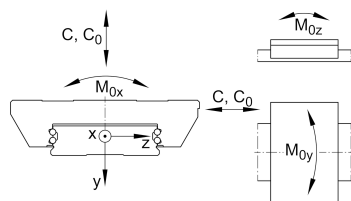

Mounting dimensions

A ₁	25,5 mm	Distance from locating edge on carriage to locating edge on guideway
J _B	107 mm	
b	69 mm	Width rail
A ₂	6,5 mm	Distance from locating edge to hole
L ₁	60,7 mm	
J _L	45 mm	
H ₁	5,2 mm	Free space, system dimension
H ₄	9,9 mm	
H ₅	5 mm	
T ₅	10 mm	Thread depth
T ₆	8,5 mm	
G ₂	M8	Fixing screws above (DIN ISO 4762-12.9)
G ₂ M _A	41 Nm	Maximum tightening torque
K ₃	M6	Fixing screws below (DIN ISO 4762-12.9)
K ₃ M _A	17 Nm	Maximum tightening torque
K ₆	M6	Fixing screws below (DIN 7984-8.8)
K ₆ M _A	8 Nm	Maximum tightening torque
D ₂	6,7 mm	
A ₃	10 mm	Position lubrication connector
G ₃	M6	Lubrication connector
t G ₃	6 mm	Maximum permissible screw depth for lubrication connectors

Additional information

VMKB_065	KWVE	Material name
----------	------	---------------