
**LSHE20-N**

Plummer block housing unit

Plummer block housing unit LSHE...-N, RIBB
cast iron SHE

Informacje techniczne

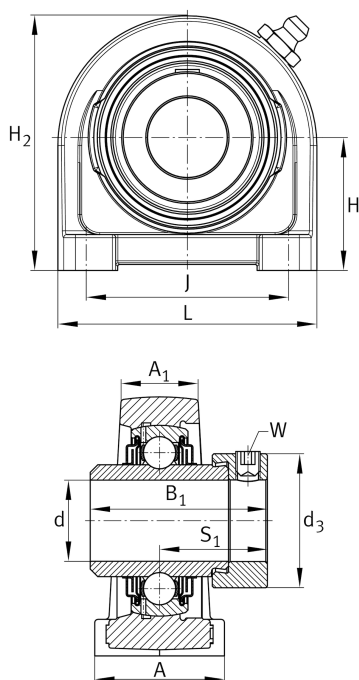

Twoja aktualna wersja produktu

Groove	N	Cast iron housing with undercut slot for end caps
Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	20 mm	Bore diameter
L	65 mm	Length total
H ₂	64 mm	Height
C _r	13.600 N	Basic dynamic load rating, radial
C _{0r}	6.600 N	Basic static load rating, radial
≈m	0,49 kg	Masa

Mounting dimensions

J	50,8 mm	Distance fixing bore
K	M8	Thread fixing bore

Dimensions

H	33,3 mm	Distance shaft axis
A	32 mm	Width (base)
A ₁	19 mm	Width (head)
Q	M6	Connection thread for lubrication
B ₁	43,7 mm	Locking collar total width
S ₁	26,6 mm	Distance of raceway to locking collar



Additional information

GEHSHE04-GG-N	Housing
GE20-XL-KLL-B	Bearing designation
KASK04	Protecting cap

Temperature range

T _{min}	-40 °C	Operating temperature min.
T _{max}	180 °C	Operating temperature max.