
**LSHE25-N**

Plummer block housing unit

Plummer block housing unit LSHE...-N, RIBB
cast iron SHE

Informacje techniczne

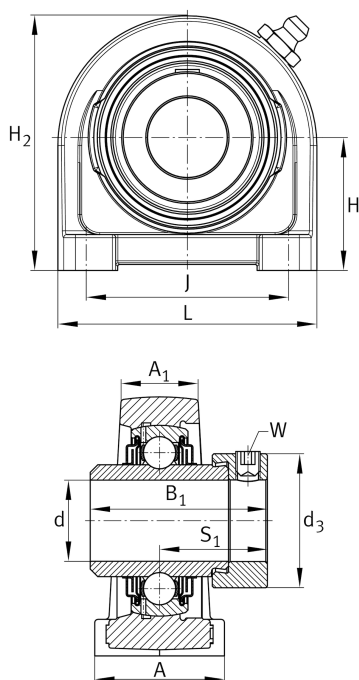

Twoja aktualna wersja produktu

Groove	N	Cast iron housing with undercut slot for end caps
Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	25 mm	Bore diameter
L	70 mm	Length total
H ₂	70 mm	Height
C _r	14.900 N	Basic dynamic load rating, radial
C _{0r}	7.800 N	Basic static load rating, radial
≈m	0,61 kg	Masa

Mounting dimensions

J	50,8 mm	Distance fixing bore
K	M10	Thread fixing bore

Dimensions

H	36,5 mm	Distance shaft axis
A	36 mm	Width (base)
A ₁	21 mm	Width (head)
Q	M6	Connection thread for lubrication
B ₁	44,5 mm	Locking collar total width
S ₁	27 mm	Distance of raceway to locking collar



Additional information

GEHSHE05-GG-N	Housing
GE25-XL-KLL-B	Bearing designation
KASK05	Protecting cap

Temperature range

T _{min}	-40 °C	Operating temperature min.
T _{max}	180 °C	Operating temperature max.