**NA6909-ZW-XL**

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

Twoja aktualna wersja produktu



Cage	Standard	
Cage feature	Standard	
Special features	Standard	
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

d	45 mm	Bore diameter
D	68 mm	Outside diameter
B	40 mm	Width
C _r	79.000 N	Basic dynamic load rating, radial
C _{0r}	127.000 N	Basic static load rating, radial
C _{ur}	21.800 N	Fatigue load limit, radial
n _G	8.600 1/min	Limiting speed
n _{gr}	4.750 1/min	Reference speed
≈m	508 g	Masa

Dimensions

F	52 mm	Raceway diameter inner ring
r _{min}	0,6 mm	Minimum chamfer dimension
s	0,5 mm	Axial displacement

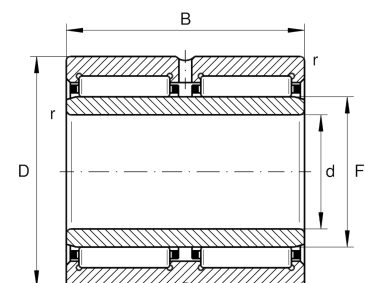



Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy