



NA6910-ZW-XL-C3

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

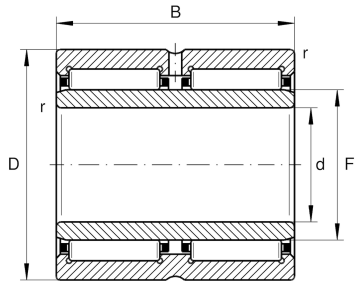

Twoja aktualna wersja produktu

Cage	Standard	
Cage feature	Standard	
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Special features	Standard	
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

d	50 mm	Bore diameter
D	72 mm	Outside diameter
B	40 mm	Width
C _r	82.000 N	Basic dynamic load rating, radial
C _{0r}	139.000 N	Basic static load rating, radial
C _{ur}	23.800 N	Fatigue load limit, radial
n _G	7.800 1/min	Limiting speed
n _{gr}	4.200 1/min	Reference speed
≈m	0,514 kg	Masa



Dimensions

F	58 mm	Raceway diameter inner ring
r _{min}	0,6 mm	Minimum chamfer dimension
s	0,5 mm	Axial displacement

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Mała przestrzeń zabudowy