**NA6912-ZW-XL** [🔗](#)

Needle roller bearing

Needle roller bearings NA69...ZW, Dimension series 69, double row

X-life

Informacje techniczne

Twoja aktualna wersja produktu



Cage	Standard	
Cage feature	Standard	
Special features	Standard	
Number of rows	ZW	Double-row design

Main Dimensions & Performance Data

d	60 mm	Bore diameter
D	85 mm	Outside diameter
B	45 mm	Width
C _r	106.000 N	Basic dynamic load rating, radial
C _{0r}	191.000 N	Basic static load rating, radial
C _{ur}	33.000 N	Fatigue load limit, radial
n _G	6.700 1/min	Limiting speed
n _{gr}	3.700 1/min	Reference speed
≈m	0,794 kg	Masa

Dimensions

F	68 mm	Raceway diameter inner ring
r _{min}	1 mm	Minimum chamfer dimension
s	1,5 mm	Axial displacement

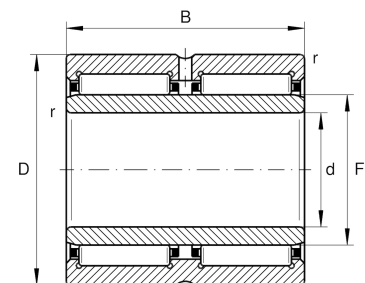



Temperature range

T_{min}	-30 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Właściwości



Obciążenie promieniowe



Smarowanie smarem



Smarowanie olejem



Bez uszczelnienia



Mała przestrzeń zabudowy