


PASE30-XL-N

Plummer block housing unit

Plummer block housing units PASE, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

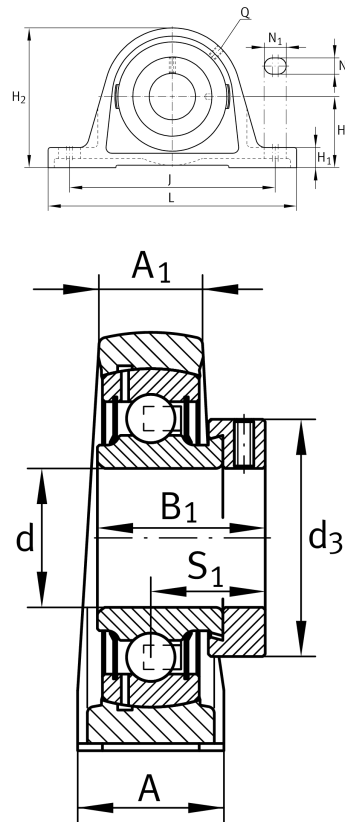

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Groove	N	Cast iron housing with undercut slot for end caps

Main Dimensions & Performance Data

d	30 mm	Bore diameter
L	158 mm	Length total
H 2	82 mm	Height
≈m	1,13 kg	Masa

Mounting dimensions

J	117,5 mm	Distance fixing bore
N	14 mm	Width (slot)
N 1	22 mm	Length (slot)



Dimensions

H	42,9 mm	Distance shaft axis
A	40 mm	Width (base)
A ₁	25 mm	Width (head)
H ₁	17 mm	Height (base)
B ₁	35,8 mm	Locking collar total width
S ₁	26,8 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Additional information

GEHASE06-GG-N	Housing
GRAE30-XL-NPP-B	Bearing designation
KASK06	Protecting cap

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.