




PSFT25-XL

Take-up housing unit

Take-up housing units PSFT, cast iron housing, radial insert ball bearing with eccentric locking collar, P seals

X-life

Informacje techniczne

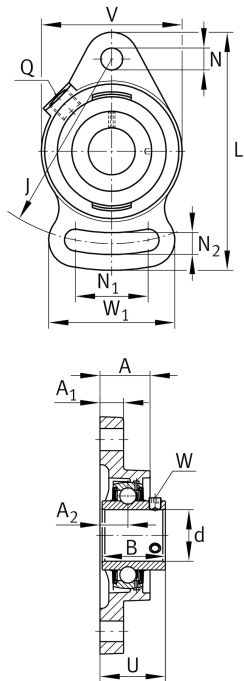

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	25 mm	Bore diameter
L	124 mm	Length total
U	36 mm	Total height unit
≈m	0,5 kg	Masa

Mounting dimensions

N	11,5 mm	Fixing bore
N ₁	37,5 mm	Length (slot)
N ₂	11,5 mm	Width (slot)
J	99 mm	Distance fixing bore

Dimensions

A ₁	11 mm	Thickness of flange
A ₂	12,5 mm	Distance raceway
A	20 mm	Height housing
V	70 mm	Shoulder diameter housing
W	63 mm	Width housing slot side
Q	M6	Connection thread for lubrication



Additional information

SFT05	Housing
GRAE25-XL-NPP-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.