




FAG

QJ348-N2-MPA-C3

Four-point contact bearing

Four point contact bearing QJ3...-N2-MPA, holding grooves, solid brass cage

Informacje techniczne

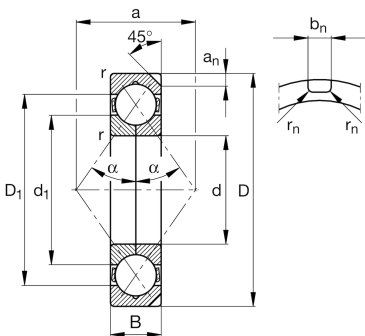

Twoja aktualna wersja produktu

Design, bearing outer ring	N2	Two retaining grooves in the outer ring on one side
Tolerance class	PN	Normal (ISO 492:2023)
Cage	MPA	Solid brass cage, outer ring guided
Dimensional / heat stabilization	S1	Rings dimensional stabilized up to 200°
Axial internal clearance	C3	Group 3 (C3), bigger than CN

Main Dimensions & Performance Data

d	240 mm	Bore diameter
D	500 mm	Outside diameter
B	95 mm	Width
C _r	1.030.000 N	Basic dynamic load rating, radial
C _{0r}	1.980.000 N	Basic static load rating, radial
C _{ur}	58.000 N	Fatigue load limit, radial
n _G	2.220 1/min	Limiting speed
n _{gr}	950 1/min	Reference speed

≈m 98,2 kg Masa

Mounting dimensions

d _{a min}	260 mm	Minimum diameter shaft shoulder
D _{a max}	480 mm	Maximum diameter of housing shoulder
r _{a max}	4 mm	Maximum fillet radius



Dimensions

r _{min}	5 mm	Minimum chamfer dimension
D ₁	410 mm	Shoulder diameter outer ring
d ₁	330,7 mm	Shoulder diameter inner ring
a	259,1 mm	Distance between the apexes of the pressure cones
a _n	15 mm	Hight retaining slot
b _n	12,5 mm	Width retaining slot
r _n	2,5 mm	Radius retaining slot
	45 °	Angle retaining slot
α	35 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Obciążenie osiowe dwukierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia
- 

Łożysko gabarytowe