

RASE120-XL

Plummer block housing unit

Plummer block housing units RASE, cast iron housing, radial insert ball bearing with eccentric locking collar, R seals

X-life

Informacje techniczne



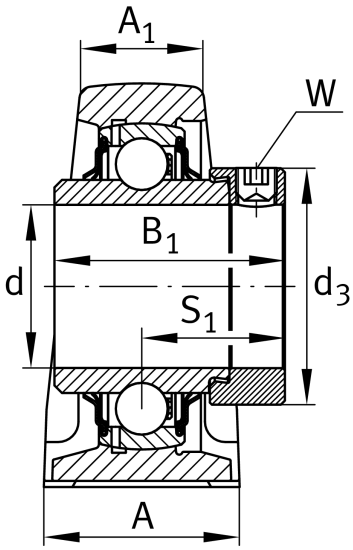

Twoja aktualna wersja produktu

Material	GG	Grey cast iron

Main Dimensions & Performance Data

d	120 mm	Bore diameter
L	440 mm	Length total
H_2	265 mm	Height
≈m	26,52 kg	Masa

Mounting dimensions

J	358 mm	Distance fixing bore
N	33 mm	Width (slot)
N_1	41 mm	Length (slot)

Dimensions

H	135 mm	Distance shaft axis
A	105 mm	Width (base)
A_1	70 mm	Width (head)
H_1	45 mm	Height (base)
B_1	81 mm	Locking collar total width
S_1	52,5 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje

Additional information

	ASE24	Housing
	GE120-XL-KRR-B	Bearing designation

Temperature range

T_{min}	-20 °C	Operating temperature min.
T_{max}	120 °C	Operating temperature max.

Karta katalogowa jest jedynie przeglądem wymiarów i podstawowych nośności wybranego produktu. Zawsze należy stosować się do wszystkich dalszych informacji i instrukcji dotyczących tego produktu. Na naszej stronie internetowej znajduje się formularz kontaktowy umożliwiający wysłanie zapytania o dalsze informacje