




RASEY40-XL-N

Plummer block housing unit

Plummer block housing units RASEY, cast iron housing, radial insert ball bearing with grub screws in inner ring, R seals

X-life

Informacje techniczne

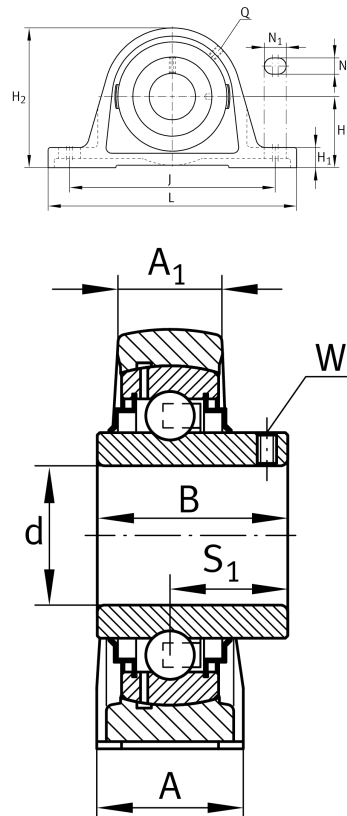

Twoja aktualna wersja produktu

|          |    |                                                   |
|----------|----|---------------------------------------------------|
| Material | GG | Grey cast iron                                    |
| Groove   | N  | Cast iron housing with undercut slot for end caps |

Main Dimensions & Performance Data

|     |          |               |
|-----|----------|---------------|
| d   | 40 mm    | Bore diameter |
| L   | 179 mm   | Length total  |
| H 2 | 99 mm    | Height        |
| ≈m  | 1,839 kg | Masa          |

Mounting dimensions

|     |           |                      |
|-----|-----------|----------------------|
| J   | 138,25 mm | Distance fixing bore |
| N   | 14 mm     | Width (slot)         |
| N 1 | 26 mm     | Length (slot)        |



Dimensions

|                |         |                                       |
|----------------|---------|---------------------------------------|
| H              | 49,2 mm | Distance shaft axis                   |
| A              | 48 mm   | Width (base)                          |
| A <sub>1</sub> | 30 mm   | Width (head)                          |
| H <sub>1</sub> | 19 mm   | Height (base)                         |
| B              | 49,2 mm | Width                                 |
| S <sub>1</sub> | 30,2 mm | Distance of raceway to locking collar |
| Q              | M6      | Connection thread for lubrication     |

Additional information

|                |                     |
|----------------|---------------------|
| ASE08          | Housing             |
| GYE40-XL-KRR-B | Bearing designation |
| KASK08         | Protecting cap      |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |