



SL1818/560-E-TB-C3

Cylindrical roller bearing

Cylindrical roller bearing, SL1818..-E-TB
full complement roller set, single row, semi-
locating bearing, 1 rib on outer ring, 2 ribs on
inner ring, type SL18

Informacje techniczne




Twoja aktualna wersja produktu

Design	TB	Bearings with increased axial load capacity
Radial internal clearance	C3 (Group 3)	Internal clearance larger than CN
Tolerance class	PN	Normal (ISO 492:2023)
Number of rows	1	Single-row design

Main Dimensions & Performance Data

d	560 mm	Bore diameter
D	680 mm	Outside diameter
B	56 mm	Width
C _r	1.040.000 N	Basic dynamic load rating, radial
C _{0r}	2.290.000 N	Basic static load rating, radial
C _{ur}	217.000 N	Fatigue load limit, radial
n _G	485 1/min	Limiting speed
n _{gr}	300 1/min	Reference speed
m	38,4 kg	Masa

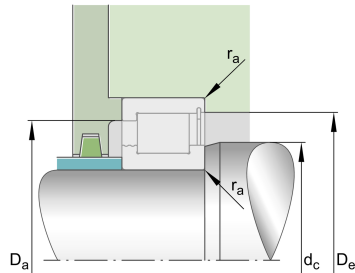



Mounting dimensions

$d_{a \min}$	603,5 mm	Minimum diameter shaft shoulder
$d_{c \min}$	603,5 mm	Minimum shaft shoulder
$D_{a \max}$	641,5 mm	Maximum diameter of housing shoulder
$D_{e \min}$	656 mm	Minimum diameter of housing shoulder
$r_{a \max}$	3 mm	Maximum recess radius
E	656 mm	Raceway diameter outer ring

Dimensions

$r_{\min}$	3 mm	Minimum chamfer dimension
s	5 mm	Axial displacement
d_1	603,5 mm	Maximum rib diameter inner ring
$D_1 \min$	641,7 mm	Minimum rib diameter outer ring

Temperature range

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.

Właściwości

-  Obciążenie promieniowe
-  Obciążenie osiowe jednokierunkowe
-  Smarowanie smarem
-  Smarowanie olejem
-  Bez uszczelnienia
-  Łożysko gabarytowe