




TKSD20X4000-B-0001-EWL-G3

Profile rail

Guideways for six-row linear recirculating ball bearing and guideway assembly

Informacje techniczne

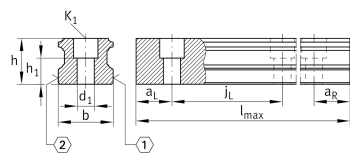

Twoja aktualna wersja produktu

Size Code	20
Length	~4000
Accuracy class	G3

Main Dimensions & Performance Data

I	4.000 mm	Guideway length
h	18 mm	Height
b	20 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	9 kg	Masa

Mounting dimensions

K1 M A	10 Nm	Tightening torque
d 1	5,8 mm	Bore diameter



Dimensions

$l_{\max}$	3.900 mm	Max length single piece guideway
$a_{L \min}$	20 mm	Distance
$a_{L \max}$	53 mm	Distance
$a_{R \min}$	20 mm	Distance
$a_{R \max}$	53 mm	Distance
j_L	60 mm	Increment
h_1	9,6 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Lower tolerance

Additional information

KWSE20...	Usable carriage(s)
KUSE20...	Usable linear systems