




TKSD30X6000-B-0001-EWL-G3

Profile rail

Guideways for six-row linear recirculating ball bearing and guideway assembly

Informacje techniczne

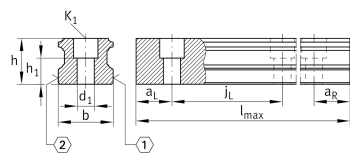

Twoja aktualna wersja produktu

Size Code	30
Length	~6000
Accuracy class	G3

Main Dimensions & Performance Data

I	6.000 mm	Guideway length
h	25 mm	Height
b	28 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	25,96 kg	Masa

Mounting dimensions

K 1	M8	Fixing screws (DIN ISO 4762-12.9)
K1 M A	41 Nm	Tightening torque
d 1	9 mm	Bore diameter



Dimensions

l_{max}	6.000 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	71 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	71 mm	Distance
j_L	80 mm	Increment
h_1	12,5 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Lower tolerance

Additional information

KWSE30...	Usable carriage(s)
KUSE30...	Usable linear systems