




TKSD45X6000-B-0001-EWL-G3 [↗](#)
Profile rail

Guideways for six-row linear recirculating ball bearing and guideway assembly

Informacje techniczne

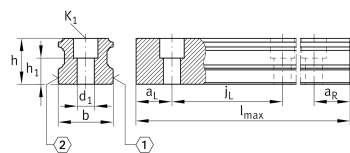

Twoja aktualna wersja produktu

Size Code	45
Length	~6000
Accuracy class	G3

Main Dimensions & Performance Data

I	6.000 mm	Guideway length
h	37,2 mm	Height
b	45 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	64,23 kg	Masa

Mounting dimensions

K 1	M12	Fixing screws (DIN ISO 4762-12.9)
K1 M A	140 Nm	Tightening torque
d 1	13,4 mm	Bore diameter



Dimensions

l_{max}	5.985 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	94 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	94 mm	Distance
j_L	105 mm	Increment
h_1	18,7 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Lower tolerance

Additional information

KWSE45...	Usable carriage(s)
KUSE45...	Usable linear systems