




TSX25X4000-D-0001-EWL-G2

Profile rail

Guideways for linear recirculating roller bearing, TSX...-D

Informacje techniczne

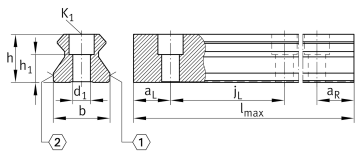

Twoja aktualna wersja produktu

Size Code	25
Length	~4000
Version	D
Accuracy class	G2

Main Dimensions & Performance Data

I	4.000 mm	Guideway length
h	22,3 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	11,67 kg	Masa

Mounting dimensions

K 1	M6	Fixing screws (DIN ISO 4762-12.9)
d 1	6,8 mm	Bore diameter
K1 M A	17 Nm	Tightening torque



Dimensions

l_{max}	3.930 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	23 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	23 mm	Distance
j_L	30 mm	Increment
h_1	11,8 mm	Length
Tol h_1	0,5 mm	Upper tolerance
Tol h_1	-0,5 mm	Lower tolerance

Additional information

RWU25-E-...	Usable carriage(s)
RUE25-E-...	Usable linear systems