


TSX25X4000-D-U-0001-EWL-G2

Profile rail

Guideways for linear recirculating roller bearing, for screw mounting from below, TSX...-D-U

Informacje techniczne

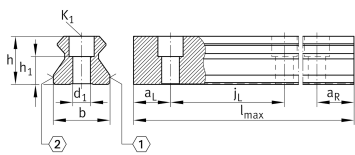

Twoja aktualna wersja produktu

Size Code	25	
Length	~4000	
Version	D	
Locationg guideway	U	Hole pattern from below
Accuracy class	G2	

Main Dimensions & Performance Data

I	4,000 mm	Guideway length
h	22,3 mm	Height
b	23 mm	Width
Tol b	-0,005 mm	Upper tolerance
Tol b	-0,035 mm	Lower tolerance
≈m	12,71 kg	Masa

Mounting dimensions

G 1	M6	Fixing screws (DIN ISO 4762-12.9)
G1 M A	17 Nm	Tightening torque



Dimensions

l_{max}	3.930 mm	Max length single piece guideway
$a_{L min}$	20 mm	Distance
$a_{L max}$	23 mm	Distance
$a_{R min}$	20 mm	Distance
$a_{R max}$	23 mm	Distance
j_L	30 mm	Increment
t_7	12,5 mm	Thread length

Additional information

RWU25-E-...	Usable carriage(s)
RUE25-E-...	Usable linear systems