




FAG

UCFA210-32

Take-up housing unit

Housing units UCFA, cast iron housing, radial insert ball bearing with grub screws in inner ring, RSR seals, for swivel motion

Informacje techniczne

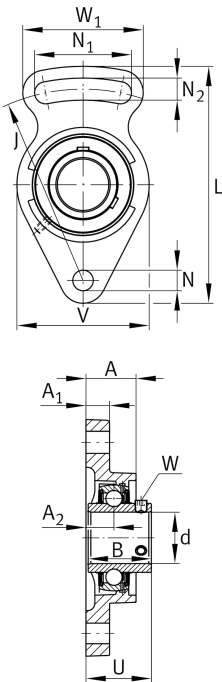

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|    |          |                   |
|----|----------|-------------------|
| d  | 50,8 mm  | Bore diameter     |
| L  | 190 mm   | Length total      |
| U  | 54,6 mm  | Total height unit |
| ≈m | 2,057 kg | Masa              |

Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| N   | 16 mm  | Fixing bore          |
| N 1 | 76 mm  | Length (slot)        |
| N 2 | 16 mm  | Width (slot)         |
| J   | 157 mm | Distance fixing bore |

Dimensions

|     |         |                                   |
|-----|---------|-----------------------------------|
| A 1 | 18 mm   | Thickness of flange               |
| A 2 | 22 mm   | Distance raceway                  |
| A   | 37,5 mm | Height housing                    |
| V   | 115 mm  | Shoulder diameter housing         |
| W   | 94 mm   | Width housing slot side           |
| Q   | M6      | Connection thread for lubrication |



Additional information

|          |                     |
|----------|---------------------|
| FA210    | Housing             |
| UC210-32 | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |