



**FAG****UCP212-36** [🔗](#)

Plummer block housing unit

Plummer block housing units UCP, cast iron housing, with long base, radial insert ball bearing with grub screws in inner ring, RSR seals

Informacje techniczne

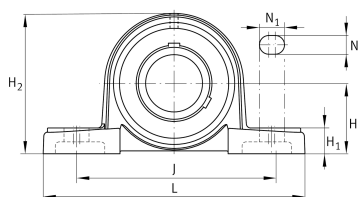

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
Housing clearance	J7	Normal swivel torque

Main Dimensions & Performance Data

d	57,15 mm	Bore diameter
L	241 mm	Length total
H ₂	138 mm	Height
C _r	56.000 N	Basic dynamic load rating, radial
C _{0r}	36.000 N	Basic static load rating, radial
C _{ur}	1.870 N	Fatigue load limit, radial
≈m	4,746 kg	Masa

Mounting dimensions

J	184 mm	Distance fixing bore
N	20 mm	Width (slot)
N ₁	25 mm	Length (slot)



Dimensions

H	69,8 mm	Distance shaft axis
A	70 mm	Width (base)
H ₁	25 mm	Height (base)
B	65,1 mm	Width
S ₁	39,7 mm	Distance of raceway to locking collar
Q	M6	Connection thread for lubrication

Additional information

P212	Housing
UC212-36	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.