


FAG

UKF209

Flanged housing unit

Flanged housing unit UKF

Informacje techniczne

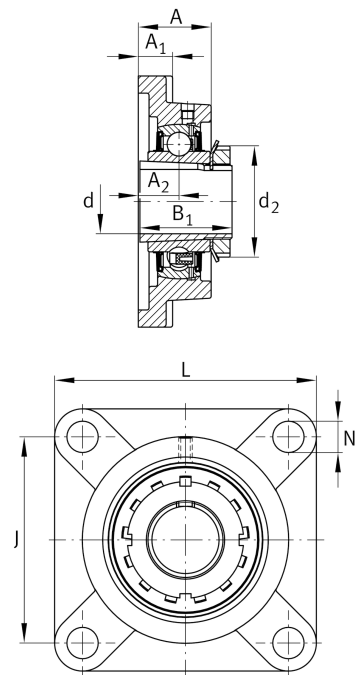

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	40 mm	Bore diameter
L	137 mm	Flange width
C _r	34.500 N	Basic dynamic load rating, radial
C _{0r}	20.400 N	Basic static load rating, radial
C _{ur}	1.060 N	Fatigue load limit, radial
≈m	2,43 kg	Masa

Mounting dimensions

J	105 mm	Distance fixing bore
N	16 mm	Fixing bore
n	4	Number of screwing holes

Dimensions

A	38 mm	Height housing
A ₁	18 mm	Thickness of flange
A ₂	22 mm	Distance raceway
B	32 mm	Width
B ₁	50 mm	Locking collar total width
d ₃	65 mm	Outside diameter eccentric locking collar



Additional information

1	Number of housings
F209	Housing
UK209	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.