




FAG

UKFC217

Flanged housing unit

Flanged housing unit UKFC

Informacje techniczne

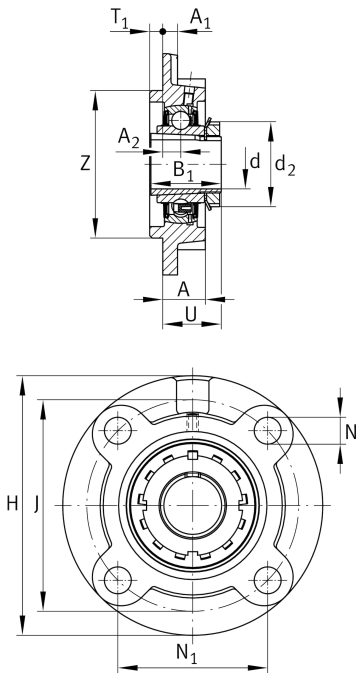

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	75 mm	Bore diameter
H	250 mm	Height flange
U	60,2 mm	Total height unit
C _r	88.000 N	Basic dynamic load rating, radial
C _{0r}	64.000 N	Basic static load rating, radial
C _{ur}	3.050 N	Fatigue load limit, radial
≈m	10,87 kg	Masa

Mounting dimensions

J	208 mm	Pitch circle diameter (holes)
N	23 mm	Fixing bore
N ₁	147,1 mm	Distance fixing bore
T ₁	18 mm	Height spigot
Z	180 mm	Diameter spigot
	h8	Diameter spigot clearance
n	4	Number of screwing holes



Dimensions

A	45 mm	Height housing
A ₁	20 mm	Thickness of flange
A ₂	18 mm	Distance raceway
B	48 mm	Width
B ₁	82 mm	Locking collar total width
d ₃	110 mm	Outside diameter eccentric locking collar

Additional information

1	Number of housings
FC217	Housing
UK217	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.