

**FAG****UKP205**

## Plummer block housing unit

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

## Informacje techniczne

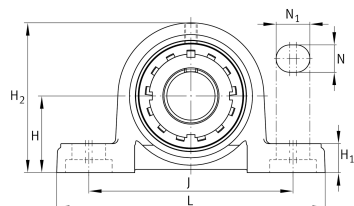

## Twoja aktualna wersja produktu

|                   |    |                      |
|-------------------|----|----------------------|
| Material          | GG | Grey cast iron       |
| Housing clearance | J7 | Normal swivel torque |

## Main Dimensions &amp; Performance Data

|     |         |               |
|-----|---------|---------------|
| d   | 20 mm   | Bore diameter |
| L   | 140 mm  | Length total  |
| H 2 | 71 mm   | Height        |
| ≈m  | 0,84 kg | Masa          |

## Mounting dimensions

|     |        |                      |
|-----|--------|----------------------|
| J   | 105 mm | Distance fixing bore |
| N   | 13 mm  | Width (slot)         |
| N 1 | 19 mm  | Length (slot)        |

## Dimensions

|     |         |                                   |
|-----|---------|-----------------------------------|
| H   | 36,5 mm | Distance shaft axis               |
| A   | 38 mm   | Width (base)                      |
| H 1 | 15 mm   | Height (base)                     |
| B 1 | 35 mm   | Locking collar total width        |
| Q   | M6      | Connection thread for lubrication |



Additional information

|       |                     |
|-------|---------------------|
| P205  | Housing             |
| UK205 | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |