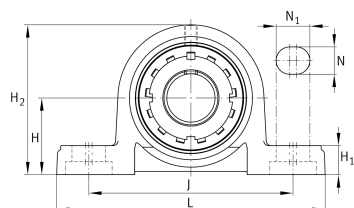

**FAG****UKP206** **Plummer block housing unit**

Plummer block housing units UKP, cast iron housing, with long base, radial insert ball bearing with adapter sleeve, RSR seals

**Informacje techniczne****Twoja aktualna wersja produktu**

|                   |    |                      |
|-------------------|----|----------------------|
| Material          | GG | Grey cast iron       |
| Housing clearance | J7 | Normal swivel torque |

**Main Dimensions & Performance Data**

|     |         |               |
|-----|---------|---------------|
| d   | 25 mm   | Bore diameter |
| L   | 165 mm  | Length total  |
| H 2 | 83 mm   | Height        |
| ≈m  | 1,35 kg | Masa          |

**Mounting dimensions**

|     |        |                      |
|-----|--------|----------------------|
| J   | 121 mm | Distance fixing bore |
| N   | 17 mm  | Width (slot)         |
| N 1 | 21 mm  | Length (slot)        |

**Dimensions**

|     |         |                                   |
|-----|---------|-----------------------------------|
| H   | 42,9 mm | Distance shaft axis               |
| A   | 48 mm   | Width (base)                      |
| H 1 | 17 mm   | Height (base)                     |
| B 1 | 38 mm   | Locking collar total width        |
| Q   | M6      | Connection thread for lubrication |



Additional information

|       |                     |
|-------|---------------------|
| P206  | Housing             |
| UK206 | Bearing designation |

Temperature range

|                  |        |                            |
|------------------|--------|----------------------------|
| T <sub>min</sub> | -20 °C | Operating temperature min. |
| T <sub>max</sub> | 120 °C | Operating temperature max. |