




FAG

UKT207

Take-up housing unit

Housing units UKT, cast iron housing, radial insert ball bearing with adapter sleeve, RSR seals, for linear motion

Informacje techniczne

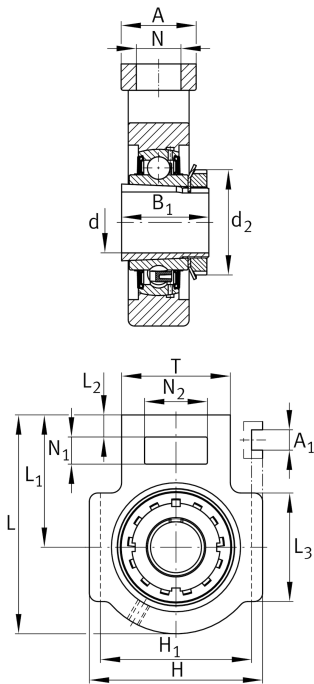

Twoja aktualna wersja produktu

|          |    |                |
|----------|----|----------------|
| Material | GG | Grey cast iron |
|----------|----|----------------|

Main Dimensions & Performance Data

|   |       |               |
|---|-------|---------------|
| d | 30 mm | Bore diameter |
|---|-------|---------------|

|   |        |        |
|---|--------|--------|
| H | 102 mm | Height |
|---|--------|--------|

|   |        |              |
|---|--------|--------------|
| L | 129 mm | Length total |
|---|--------|--------------|

|     |       |                            |
|-----|-------|----------------------------|
| B 1 | 43 mm | Locking collar total width |
|-----|-------|----------------------------|

|    |         |      |
|----|---------|------|
| ≈m | 1,66 kg | Masa |
|----|---------|------|

Mounting dimensions

|     |       |                       |
|-----|-------|-----------------------|
| A 1 | 12 mm | Width guidance groove |
|-----|-------|-----------------------|

|        |                                       |
|--------|---------------------------------------|
| 0,2 mm | Upper width guidance groove tolerance |
|--------|---------------------------------------|

|      |                                       |
|------|---------------------------------------|
| 0 mm | Lower width guidance groove tolerance |
|------|---------------------------------------|

|     |       |                           |
|-----|-------|---------------------------|
| H 1 | 89 mm | Distance guidance grooves |
|-----|-------|---------------------------|

|      |                                          |
|------|------------------------------------------|
| 0 mm | Upper distance guidance groove tolerance |
|------|------------------------------------------|

|         |                                          |
|---------|------------------------------------------|
| -0,5 mm | Lower distance guidance groove tolerance |
|---------|------------------------------------------|

|   |       |             |
|---|-------|-------------|
| N | 22 mm | Fixing bore |
|---|-------|-------------|



Dimensions

|     |       |                                   |
|-----|-------|-----------------------------------|
| L 1 | 78 mm | Distance shaft axis               |
| L 2 | 13 mm | Length fixed link                 |
| L 3 | 64 mm | Length guidance groove            |
| A   | 37 mm | Width housing fixing side         |
| N 1 | 16 mm | Width recess                      |
| N 2 | 37 mm | Height recess                     |
| T   | 64 mm | Height housing fixing side        |
| Q   | M6    | Connection thread for lubrication |
| A 2 | 30 mm | Width housing                     |

Additional information

|       |                     |
|-------|---------------------|
| T207  | Housing             |
| UK207 | Bearing designation |

Temperature range

|       |        |                            |
|-------|--------|----------------------------|
| T min | -20 °C | Operating temperature min. |
| T max | 100 °C | Operating temperature max. |