





RCJY80-XL

Flanged housing unit

Housing units RCJY, four-bolt flanged housing units, cast iron, grub screws in inner ring, R seals

X-life

Informacje techniczne

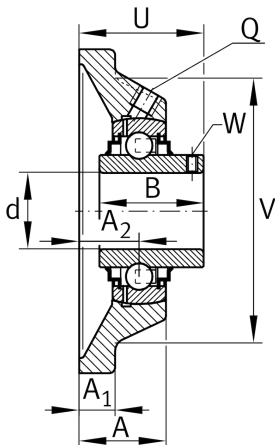

Twoja aktualna wersja produktu

Material	GG	Grey cast iron
----------	----	----------------

Main Dimensions & Performance Data

d	80 mm	Bore diameter
L	197 mm	Flange width
U	90,6 mm	Total height unit
C _r	76.000 N	Basic dynamic load rating, radial
C _{0r}	54.000 N	Basic static load rating, radial
C _{ur}	2.190 N	Fatigue load limit, radial

≈m	6,47 kg	Masa
----	---------	------

Mounting dimensions

J	153 mm	Distance fixing bore
N	23 mm	Fixing bore

n	4	Number of screwing holes
---	---	--------------------------



Dimensions

A	56,3 mm	Height housing
A ₁	20 mm	Thickness of flange
A ₂	41,3 mm	Distance raceway
B	82,6 mm	Width
V	180 mm	Shoulder diameter housing
Q	M6	Connection thread for lubrication

Additional information

1	Number of housings
CJ16	Housing
GYE80-XL-KRR-B	Bearing designation

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.