


**FAG****HC71913-E-T-P4S-UL**

High speed spindle bearing

High speed spindle bearing HC719...-E,
adjusted, in pairs or sets, contact angle $\alpha = 25^\circ$, with ceramic balls, restricted tolerances

Informacje techniczne

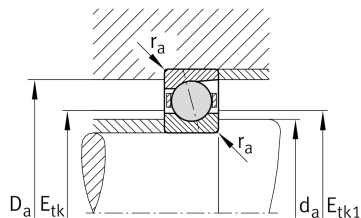

Twoja aktualna wersja produktu

Preload	L	Preload light
Contact angle	E	Contact angle 25°
Sealing	Without	Not sealed
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing

Main Dimensions & Performance Data

d	65 mm	Bore diameter
D	90 mm	Outside diameter
B	13 mm	Width
C_r	13.000 N	Basic dynamic load rating, radial
C_{0r}	8.900 N	Basic static load rating, radial
C_{ur}	720 N	Fatigue load limit, radial
n_G Grease	24.000 1/min	Limiting speed for grease lubrication
n_G Oil	36.000 1/min	Limiting speed for oil lubrication
$\approx m$	0,19 kg	Masa



Mounting dimensions

d _a	70 mm	Diameter shaft shoulder
d _a	h12	Diameter shaft shoulder clearance
D _a	85,5 mm	Shoulder diameter outer ring
D _a	H12	Shoulder diameter outer ring clearance
r _{a max}	0,6 mm	Maximum recess radius
r _{a1 max}	0,3 mm	Maximum recess radius
E _{tk min}	74,2 mm	Minimum diameter injection pitch
E _{tk max}	75,3 mm	Maximum diameter injection pitch
E _{tk1 min}	72,1 mm	Minimum diameter injection pitch
E _{tk1 max}	75,3 mm	Maximum diameter injection pitch
a	24,6 mm	Distance between the apexes of the pressure cones

Dimensions

r _{min}	1 mm	Minimum chamfer dimension
r _{1 min}	1 mm	Minimum chamfer dimension
α	25 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	100 °C	Operating temperature max.



Additional information

F_{VL}	53 N	Preload force light
F_{VM}	160 N	Preload force medium
F_{VH}	321 N	Preload force heavy
K_{aEL}	153 N	Lift-off force light
K_{aEM}	466 N	Lift-off force medium
K_{aEH}	946 N	Lift-off force heavy
c_{aL}	103 N/ μ m	Axial rigidity light
c_{aM}	152 N/ μ m	Axial rigidity medium
c_{aH}	196 N/ μ m	Axial rigidity heavy

Właściwości

- 

Obciążenie promieniowe
- 

Obciążenie osiowe jednokierunkowe
- 

Smarowanie smarem
- 

Smarowanie olejem
- 

Bez uszczelnienia