




FAG

HCM71913-C-2RSD-T-P4S-UL-XL

High speed spindle bearing

High speed spindle bearing HCM719...-C-2RSD, adjusted, in pairs or sets, contact angle $\alpha = 17^\circ$, with ceramic balls, lip seals on both sides, non-contact, restricted tolerances

Informacje techniczne

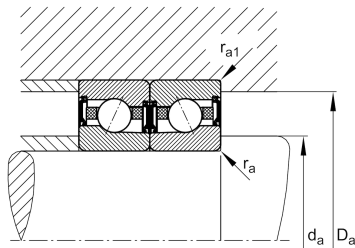

Twoja aktualna wersja produktu

Preload	L	Preload light
Contact angle	Contact angle 17°	Contact angle 17°
Sealing	2RSD	Non-contact sealed on both sides and greased "for life"
Cage	T	Laminated fabric cage
Tolerance class	P4S	Tolerance class P4S, FAG standard better than P4 to ISO 492:2023
Arrangement bearing set	U	Single bearing

Main Dimensions & Performance Data

d	65 mm	Bore diameter
D	90 mm	Outside diameter
B	13 mm	Width
C _r	19.800 N	Basic dynamic load rating, radial
C _{0r}	11.100 N	Basic static load rating, radial
C _{ur}	890 N	Fatigue load limit, radial
n _G Grease	26.000 1/min	Limiting speed for grease lubrication
≈m	165 g	Masa



Mounting dimensions

d _a	70 mm	Diameter shaft shoulder
d _a	h12	Diameter shaft shoulder clearance
D _a	85,5 mm	Shoulder diameter outer ring
D _a	H12	Shoulder diameter outer ring clearance
r _{a max}	0,6 mm	Maximum recess radius
r _{a1 max}	0,3 mm	Maximum recess radius
a	18,3 mm	Distance between the apexes of the pressure cones

Dimensions

r _{min}	1 mm	Minimum chamfer dimension
r _{1 min}	0,6 mm	Minimum chamfer dimension
α	17 °	Contact angle

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	80 °C	Operating temperature max.

Additional information

F _{V L}	86 N	Preload force light
F _{V M}	226 N	Preload force medium
F _{V H}	474 N	Preload force heavy
K _{aE L}	249 N	Lift-off force light
K _{aE M}	673 N	Lift-off force medium
K _{aE H}	1.453 N	Lift-off force heavy
c _{a L}	57 N/μm	Axial rigidity light
c _{a M}	81 N/μm	Axial rigidity medium
c _{a H}	110 N/μm	Axial rigidity heavy



Właściwości



Obciążenie promieniowe



Obciążenie osiowe jednokierunkowe



Smarowanie dożywotnie, bezobsługowe



Smarowanie smarem



Uszczelnienie dwustronne